


TELEMETRY RECEIVER

BA2006-T-SB-4MHz-LAB

SPECIFICATIONS:

- **Frequency:** 2200 ÷ 2300 MHz , Whole range in 100KHz steps.
- **Noise Figure:** 5dB max
- **LO Stability:** ± 2.5 ppm (over temperature)
- **RF Input impedance:** 50 Ohm
- **Image Rejection:** 60dB min
- **IF Frequency:** 480MHz
- **IF Bandwidth (3dB Typ) :** 4MHz
- **Video Output level:** 3Vptp
- **Video Output impedance:** 75 Ohm
- **RSSI Output:** counter
- **RF Connector:** SMA type
- **Video Output Format:** Unbalanced
- **Video Connector:** BNC
- **Supply Voltage:** 220Vac
- **Enclosure:** 19 inch 2U.

MECHANICAL DRAWING:

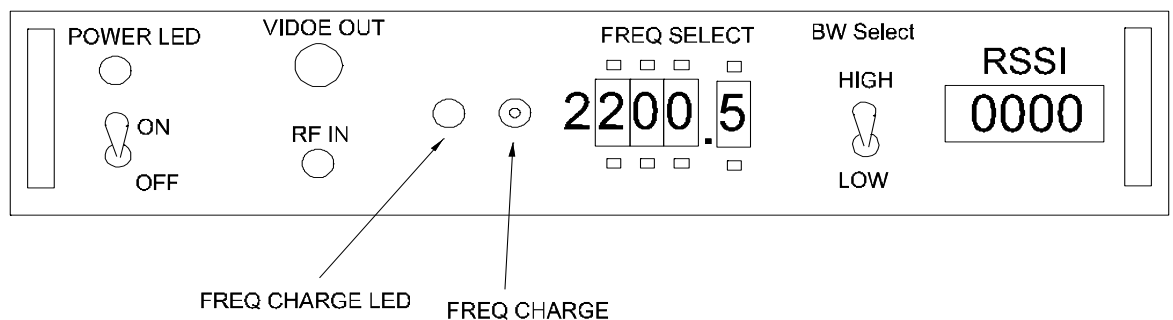

RF , video on Back Panel